

World's smallest maritime VSAT

TracPhone® V3IP

Small antenna, big performance

The ultra-compact TracPhone V3IP provides always-on broadband data connections, an integrated voice line, worldwide coverage from the mini-VSAT Broadband network, and dramatically reduced airtime costs.

- 1 Ultra-high efficiency antenna using KVH's RingFire™ design and groundbreaking dielectric rod feed ensures excellent Ku-band reception even in bad weather
- 2 Advanced antenna controller for high-speed tracking
- 3 Dynamic, gyro-stabilized system seeks the optimum satellite within the mini-VSAT Broadband network and tracks it through the full dynamic motion experienced by commercial vessels



All VIP-series products include KVH's new **Integrated CommBox Modem (ICM)** with IP-enabled antenna control unit, CommBox™ Network Manager, ArcLight® spread spectrum modem, Voice over IP, Ethernet switch, and Wi-Fi capabilities. Systems also feature a browser-based user interface and convenient iPhone® app for system status, updates, and support.

System Specifications

| Service | |
|---|--|
| Network | mini-VSAT Broadband |
| Antenna Type | Ku-band |
| Service Coverage Area | Seamless Worldwide Regions |
| Maximum Speed Download/Upload ¹ | 2 Mbps/128 Kbps |
| Abovedecks Equipment | |
| Antenna Dish Diameter | 36.8 cm (14.5") |
| Antenna Unit Dimensions/Weight | 39.4 cm D x 44.7 cm h (15.5" D x 17.6" h) / 11.3 kg (25 lbs) |
| Elevation/Azimuth Range | 7.5° to 75° / 720° rotation |
| Temperature | Operating: -25°C to 55°C (-13°F to 131°F); Survival: -35°C to 70°C (-31°F to 158°F) |
| Humidity | IEC 60945; 40°C (104°F), 95% Humidity (non-condensing) |
| Rain | Precipitation rate of 100L/min, w/wind speeds up to 100 knots |
| Antenna Unit Power | DC; provided by ICM |
| ICM to Antenna Unit Communications | 14 Conductor Data Cable |
| L-band RF Cables <i>(customer supplied)</i> | For 5-15 m (16-49 ft.) choose RG-11 For >16-30 m (49- 98 ft.) choose LMR-400-75 For >31-45 m (98-148 ft.) choose LMR-600-75 |
| Belowdecks Equipment – Integrated CommBox Modem (ICM) | |
| Dimensions | 42.6 cm (l) x 41.4 cm (w) x 2U (h) (16.8" x 16.3" x 2U) rack-mountable with optional mounting provisions ² |
| Weight | 5.1 kg (11.25 lbs) |
| Temperature | Operating: -15°C to 55°C (5°F to 131°F); Survival: -15°C to 70°C (5°F to 158°F) |
| Input Power | 100-240 VAC, 50-60 Hz auto switching, 1.6 A max |
| Data Interfaces | 4 Ethernet: IEEE 802.3 10BASE-T/100BASE-TX, 100 Mbps; 1 Wi-Fi 802.11; 3 USB ports |
| Voice Interfaces | 1 RJ11 port for VoIP services |
| System Options | |
| CommBox Software Bundles Available | Standard or Enterprise Packages - see "Featured Options" at kvh.com/V3IP for details |
| Iridium Pilot Secondary System | Available as standalone system (P/N: 72-0537-01) or V3IP/Iridium Pilot System Bundle w/least cost routing (P/N: 01-0357-01); see "Featured Options" at kvh.com/V3IP for details |
| IP-MobileCast™ Services | Coming soon; contact KVH for details |
| UCH-250 Fax Server | For enterprise-grade faxing over IP (P/N 19-0520); contact KVH for details |
| GlobalCare Premium Support Program | Available; see kvh.com/globalcare for details |
| Complete System | |
| Certification | Complies with the specifications of EC directive 1999/5/EC Radio & Telecommunications Terminal Equipment (R&TTE), per compliance with EC directive 2006/95/EC, EMC directive 2004/108/EC and IEC 301-427 |
| System Warranty ³ | Comprehensive 2-year parts, 1-year labor warranty supported by KVH's worldwide Certified Support Network (CSN) |
| Part Number / MSRP (USD) | 01-0335-11 / \$16,995 |

Meets FCC and CE requirements. Exceeds Inmarsat operational, survival, and shock specifications.

¹Published data speeds are maximum speeds and may vary in different regions and under different conditions.

²Optional Belowdecks Mounting Case (KVH Part No. 72-0368) available for vessels without a rack.

³Unless subject to in-country regulations. Restrictions apply. Visit www.kvh.com/warranty for details.

System Diagram




Integrated CommBox Modem (ICM) – Streamlined belowdecks unit includes: IP-enabled antenna control unit, built-in CommBox Ship/Shore Network Manager, ArcLight spread spectrum modem, Voice over IP (VoIP), Ethernet switch, and Wi-Fi capabilities.



TracPhone V3IP
39.4 cm D, 11.3 kg (15.5" D, 25 lbs)

95% smaller in volume than standard TDMA VSAT antennas and the world's smallest maritime VSAT, TracPhone V3IP is easier and less expensive to install.

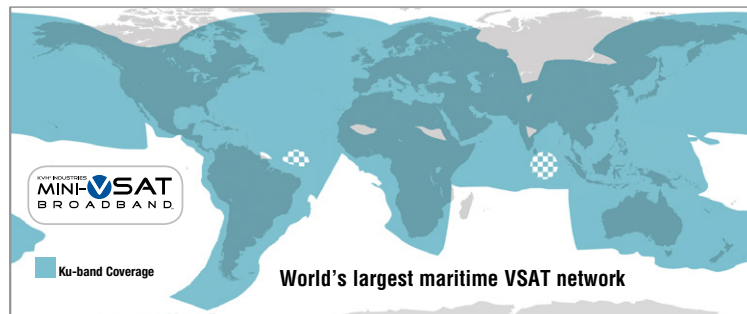

mini-VSAT Broadband Ku-band Coverage

The TracPhone V3IP is a 2-axis, stabilized antenna that does not provide coverage in areas where the satellite is directly overhead as shown in the hatched areas to the left. KVH offers a TracPhone V3IP/Iridium Pilot system bundle that offers pole-to-pole global coverage.

The map depicts KVH's expectations for mini-VSAT Broadband's coverage; actual coverage and availability may vary. Data rates may also vary in different regions. Go to www.kvh.com/minivsatmap to view our coverage map and for complete details. KVH provides no guarantees of satellite coverage or availability.



KVH Industries A/S
EMEA Headquarters
Kokkedal, Denmark
Tel: +45.45.160.180 Fax: +45.45.160.181
Email: info@emea.kvh.com

KVH Industries, Inc.
World Headquarters
Middletown, RI U.S.A.
Tel: +1.401.847.3327 Fax: +1.401.849.0045
Email: info@kvh.com

KVH Industries Pte Ltd.
Asia-Pacific Headquarters
Singapore
Tel: +65.6513.0290 Fax: +65.6472.3469
Email: info@apac.kvh.com